

PROGRAMMABLE ULTRASONIC HOMOGENISER

Feed back controlled

Introduction & Operating principle

MULH series of temperature controlled ultrasonik homogeniser transfer ultrasonic waves in the fluid through a cantilever fork at ultrasonic frequency. These vibrations creates compression waves in the liquid of the tank which 'tear' the liquid apart, leaving behind many millions of microscopic 'voids' or 'partial vacuum bubbles' (cavitation). These bubbles collapse with enormous energy; temperatures and pressures on the order of 5,000 K and 20,000 lbs per square inch are achieved;^{[6][7]} however, they are so small that they do no more than clean and remove surface dirt and contaminants. The higher the frequency, the smaller the nodes between the cavitation points, which allows for homogenization of media quickly. Multipoint sensing ensures uniform cavitation in bath to ensure homogenization. . These finds application in cell disruption, emulsification, and homogenizing of biological matter Pharmaceutical, infection control, Cosmetics & Synthetics, genetic engineering, Petrochemical, Paper and Environments application, Metal Finishing and Corrosion Control ,petrochemical , Polymer manufacturing , Medicines, biotechnology, medicine , Process control and Chemical Engineering ,Semiconductors/ Ceramics application .

Benefits:


- Compact and energy efficient.
- Automatic frequency tuning and power control.
- Synchronize power to temperature control.
- Wide voltage range.



MULH-020020



MULH-030020

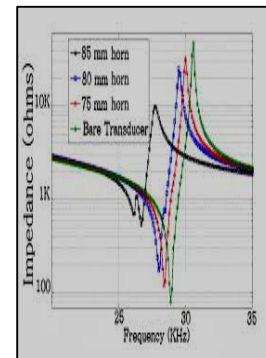

Electrical and mechanical specifications of Ultrasonic homogeniser


200.0< Pr<50000 watts

Model:	MULH-03020	MULH-01020	MULH-03020	MULH-010020	MULH-20020
Probe /size (dia/length)-inch	1/4"/8"	1/2"/12"	1/2"/16"	1"/16"	1"/24"
Operating volt/power(volt)	220	220	220	220	220
Temperature control range °C	-50 to + 200	50 to + 200	-50 to + 200	-50 to + 200	-50 to + 200
Ultrasonic wattage-watts	40	100	250	750	1500
Response time-mili sec	10	16	23	50	50
% overshoot	Critically damp	Critically damp	Critically damp	Critically damp	Critically damp
Settling time-mili second	60	80	90	110	110
Control scheme	Feedforward/ cascade	Feedforward/ cascade	Feedforward/ cascade	Feedforward/ cascade	Feedforward/ cascade
Temperature sensor type	thermopile	thermopile	thermopile	thermopile	thermopile
Temperature control range° C	-100 to 200	100 to 200	-100 to 200	-100 to 200	-100 to 200

Electrical and mechanical specifications of Ultrasonic homogeniser

- Operating power supply :220 volts/50HZ or 110 volts D.C.
- Power: as in data sheet
- Temperature control range : -100 to 200° C.
- Display accuracy : temperature/flow rate
- Permissible humidity : 90%
- Permissible ambient temperature : 60°C
- Protection : overload/short circuit.
- Power efficiency : 95%
- Cooling : air cooled
- Control : facility to operate in pulse mode/

feed back/feed forward power control with temperature profile control as preset / with 0-12 volts D.C. signal output. Automatic temperature control according to preset profile of temperature w.r.t. time with high degree of repeatability and accuracy. Digital display for temperature, stirring speed (optional). Facility to interface with PC.

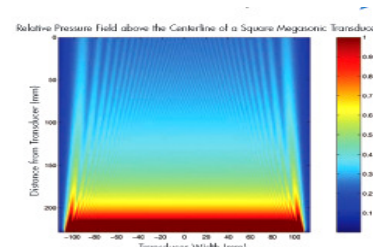

MOTORON SEMICONDUCTORS CORPORATION

33, Shri nagar colony, shakti nagar extension, DELHI-110052. Tel:011-3644180,23655454

e.mail: motoron@hotmail.com